



BESPOKE STOLELIFT


Med en stolelift fra Bespoke opnår du fuld frihed til at komme rundt i hele huset uanset udfordringer. Stoleliften er designet specielt til sving trapper, for at give den bedste bruger oplevelse og kan tilpasses i farverne for at blive en naturlig del af rummet.

Stoleliften installeres nemt af vores teknikker på jeres adresse og er nem at betjene, hvilket gør hverdagen lettere. Når stoleliften ikke er i brug, optager fodpladen kun minimalt plads ved opslåning af sæde og fodplade, så trappen fortsat kan bruges.

- Nem installation
- Ingen strukturelle ændringer i hjemmet
- Slimline og klapbar
- Pålidelig og med minimal vedligeholdelse
- Ideel for trapper med sving eller repos



- A** Total height (from floor) 970mm
- B** Height of arms (from floor) 750mm
- C** Seat height (from floor) 530mm
- D** Total width 575mm
- E** Width of footrest 252mm
- F** Total depth (from wall) 565mm
- G** Seat depth (to backrest) 380mm
- H** Depth of footrest 315mm
- I** Footrest to seat 451mm
- J** Total depth (folded) 295mm
- K** Total height (folded) 980mm

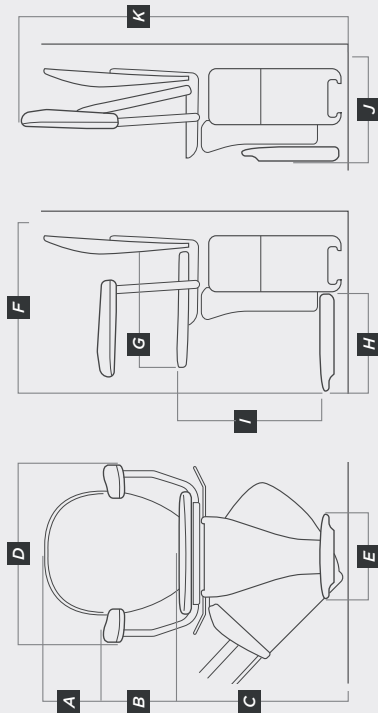

Power Supply: Input 120v-240v
Output 1.2Ah
Battery: 2x 12v
Rail Drive: Rack & Pinion
Max. seat rotation: 80°
Max. user weight: 125kg (19.5 stone)

**Minimum required
staircase width:**
SEE BTK CHART



**Minimum required
parking space:**
560mm

Minimum stair angle:
15°

Maximum stair angle:
52°

Rail positioning

A = 160mm min

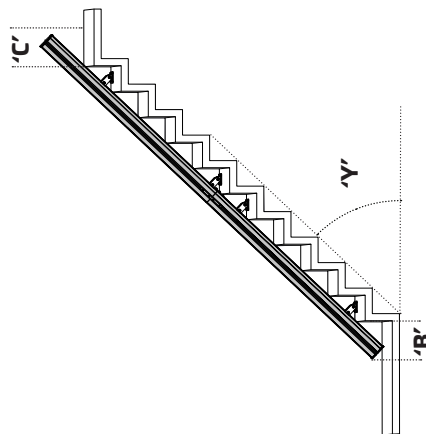

Top and bottom Synergy rail protrusions

Y°	B	C	Y°	B	C	Y°	B	C
15°	687	124	28°	385	150	41°	277	160
16°	646	126	29°	373	151	42°	272	160
17°	610	129	30°	362	152	43°	266	160
18°	578	131	31°	352	154	44°	261	160
19°	549	133	32°	342	155	45°	256	160
20°	523	135	33°	333	156	46°	252	160
21°	500	137	34°	325	158	47°	247	159
22°	479	139	35°	317	157	48°	243	159
23°	460	141	36°	309	158	49°	239	159
24°	442	143	37°	302	159	50°	235	158
25°	426	145	38°	295	159	51°	231	157
26°	411	147	39°	289	160	52°	227	156
27°	398	148	40°	283	160			